


# DFA (old model:LZM-Z) mIPm Series Acrylic Flow Meter

## Technical Parameters of DFA- series Flow Meter

Model	Measure Range			Screw thread	Accuracy
	GPM (Liquid)	LPM (Liquid)	Nm <sup>3</sup> /h (Gas)		
DFA-15A		15-150LPH	0.1-1 0.16-1.6 0.3-3 0.4-4	1/2" male BSP / NPT  1/4" female BSP / NPT	±4%
DFA-15		10-100LPH	0.04-0.4 0.1-1 0.16-1.6 0.3-3 0.25-2.5 0.4-4 0.6-6 0.8-8 1-10 1.6-16 1.8-18 2-20 2.5-25 3-30 4-40		
		16-160LPH			
		25-250LPH			
	0.03-0.35	0.1-1.4			
	0.05-0.5	0.2-1.8			
	0.1-1	0.5-4			
	0.15-1.5	0.6-6			
	0.2-2	1-7			
	0.3-3	1-11			
	0.5-5	2-18			
DFA-25	1-10	5-35	2.5-15 2.5-25 4-40 6-60 10-100 20-100 16-160 25-250 30-100 35-350	1" male BSP / NPT	
	1-15	5-50			
	2-14	10-50			
	2-20	10-70			
	5-35	10-130			
	5-40	10-150			
	5-45	10-170			
		0.3-2.1m <sup>3</sup> /h			
		0.6-3m <sup>3</sup> /h			
		0.6-4.2m <sup>3</sup> /h			

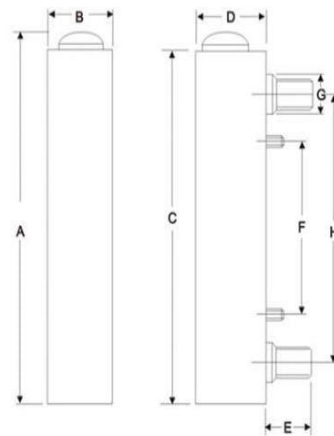

## The outline size of DFA-series Flow Meter

Model	Size(mm)							
	A	B	C	D	E	F	G	H
DFA-15A	157	32	150	35	25	60	25	110
DFA-15	175	32	168	35	25	76	25	127
DFA-25	234	45	226	46	33	100	37	160

## The material and code of the parts.

Fitting	Float	O-ring
1.ABS	☆ 1.SS	☆ 1.Silicon rubber
2.PP	2.Agate ball	2.Fluorin rubber
☆ 3.PVC	3.PTFE	
4.Brass		
5.Brass chromeplate		
6.SS		